

5485C HIGH-TEMPERATURE VELOCITY TRANSDUCER

Installation Manual



2-PIN CONNECTOR VERSION
(requires mating Model 4850-XXXX cable)



FIXED ARMORED CABLE VERSION



OVERVIEW

The Metrix 5485C High-Temperature Velocity Sensor is suitable for use in temperatures up to 375°C. It is designed for gas turbines and other machinery with high surface temperatures where a velocity signal is desired. The sensor's moving-coil design requires no external power as it self-generates a signal proportional to vibration velocity.

FEATURES

- Self generating, no power required
- Stainless Steel Housing
- Zero friction - infinite analog resolution

APPLICATIONS

- Large industrial gas turbines
- Furnace fan monitoring

HAZARDOUS AREAS

UL intrinsically safe for Class 1, Div. 1, Grps (A-D); Non-incendive for Class 1, Div. 2, Grps. (A-D). CSA intrinsically safe for: Class 1, Div. 1, Grps (A-D); ATEX/IECEx intrinsically safe for: EEx ia IIC T1-T6 Ga.

INSTALLATION

The sensitive axis of the transducer can be oriented in any direction. To ensure clean response to high frequency vibrations, the transducer must be securely mounted to a flat machined surface using four #6 (or 3mm) socket head screws. If a bracket is required, it should be of rigid construction to prevent spurious mechanical resonances in the pass band.

WIRING

In ordinary, nonhazardous locations the transducer should be wired according to Page 4 (drawing 7623, Sheet 2).

In hazardous locations the wiring method depends upon the area classification.

1. In Class I, Div 1, Groups A, B, C & D or IEC Zone 0, Group IIC hazardous locations, the transducer may be connected through a zener diode safety barrier to the safe area receiver in accordance with Page 5 (drawing 7623, Sheet 3).
2. In Class I, Div 2, Groups A, B, C & D locations the transducer may be wired as in (1), or it can be wired without a safety barrier if wired in accordance with Page 6 (drawing 8096).

ATEX/IECEx INPUT ENTITY PARAMETERS

- $U_i = 28\text{V}$
- $I_i = 120\text{mA}$
- $P_i = 625\text{ mW}$
- $C_i = 0$
- $L_i = 0.88\text{mH max.}$

SPECIFIC CONDITIONS OF USE

For Ex ia and Ex nA: In order to ensure temperature classification and safety, the power supply must adhere to the following:

- $U_o \leq 28\text{V}$
- $I_o \leq 120\text{mA}$
- $P_o \leq 0.625\text{W}$

The temperature classifications and ambient temperature range can vary as follows:

Max. Low Ambient Temp.	Max. High Ambient Temp.	Temp. Classification
-54°C	45°C	T6
	60°C	T5
	95°C	T4
	160°C	T3
	260°C	T2
	375°C	T1

For Ex ia: When terminated, the flying leads of the integral cable must be afforded a degree of protection of at least IP20.

For Ex nA: The terminations of the flying leads of the integral cable must be afforded a degree of protection of at least IP54 in accordance with the requirements of EN 60079-15 and EN/IEC 60529.

For Ex nA: External provision must be made to ensure that the maximum rated input is not exceeded by more than 40%.

For Ex nA: The connector must not be disconnected whilst the equipment is energised.

SPECIFICATIONS

TYPE: SPRING SUSPENDED DUAL COIL BOBBIN IN PERMANENT
 MAGNETIC FIELD. NO SLIDING PARTS. ZERO FRICTION.
 AXIS ORIENTATION: ANY
 SENSITIVITY: SEE TABLE A (+/- - 5% AT 100 HZ)
 CROSS AXIS SENSITIVITY: LESS THAN 10%
 EXTERNAL FIELD SENSITIVITY: < .005 IPS/GAUSS AT 60HZ
 COIL RESISTANCE: (25° C) - SEE TABLE A
 TEMPERATURE LIMITS: (SEE NOTE 3) (NOTE 10)
 CONTINUOUS: -54°C TO 37°C
 INTERMITTENT: -54°C TO 400°C
 FREQUENCY RANGE: 15 HZ TO 2000 HZ
 DISPLACEMENT LIMIT: 0.07 (1.8) PK - PK
 SENSITIVITY SHIFT VS POSITION: 5% MAX.
 SENSITIVITY VS TEMPERATURE: -.02%/°C. MAX.
 ACCELERATION LIMITS: 0 TO 50 G's
 DAMPING (ELECTRO-MAGNETIC):
 AT 20° C: 0.8
 AT 200° C: 0.55
 AT 375° C: 0.4
 CASE TO COIL ISOLATION: MEGOHMS. MIN.
 AT 375° C: 10 MEGOHMS. MIN.
 CASE MATERIAL: STAINLESS STEEL. HERMETIC SEAL.
 WEIGHT: 7.5 OZ. (.21 KG)
 HAZARD RATING: SEE SHEET 3
 SEE SHEETS 2 AND 3 FOR WIRING.

AGENCY APPROVED PRODUCT
 DO NOT DEVIATE FROM
 DOCUMENTED CONSTRUCTION
 OR LISTED PARTS


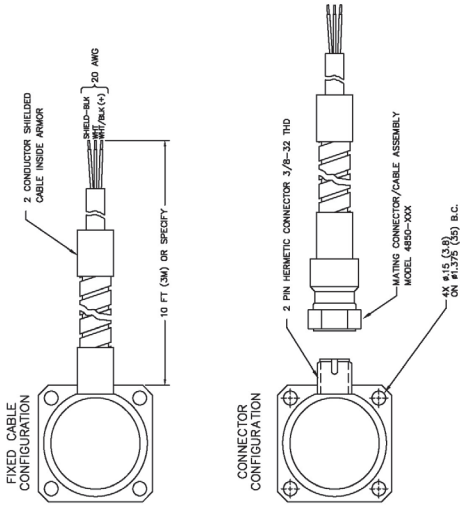


TABLE A

MODEL	SENSITIVITY	COIL RESISTANCE	TERMINATION
5485C-001-XXX *	1.05MV/IPS	7.5 OHMS	SPRING COIL CONNECTOR
5485C-002-XXX *	1.05MV/IPS	7.5 OHMS	CONNECTOR
5485C-003-XXX *	1.45MV/IPS	1.02 OHMS	FIXED CABLE
5485C-004-XXX *	1.45MV/IPS	1.02 OHMS	CONNECTOR
5485C-005-XXX *	2.00MV/IPS	1.35 OHMS	CONNECTOR
5485C-007-XXX *	15.0MV/IPS	1.05 OHMS	FIXED CABLE
5485C-008	15.0MV/IPS	1.05 OHMS	CONNECTOR

* -XXX INDICATES CABLE LENGTH IN FEET
 (EX. -010 = 10 FEET)

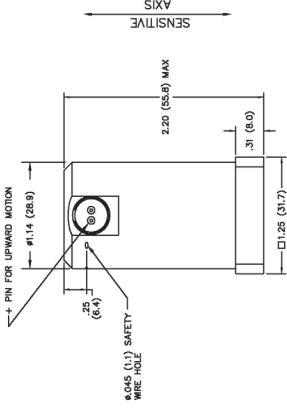



METRIX INDUSTRIAL TECHNOLOGY
 SPECIFICATION: MODEL 5485C,
 VELOCITY TRANSDUCER
 DRAWING NO. 7623 W
 REV. 1.1

THIS DOCUMENT AND ALL INFORMATION HEREON IS THE PROPERTY OF METRIX INSTRUMENT CO. ANY REPRODUCTION OR INFORMATION HEREON IS UNAUTHORIZED. THIS DOCUMENT MUST BE RETURNED UPON REQUEST.

PARTS LIST
 QUANTITY
 PART NUMBER
 DESCRIPTION
 UNIT PRICE
 TOTAL PRICE

ORDER INFORMATION
 ORDER NO.
 ORDER DATE
 ORDER TIME
 ORDER FAX
 ORDER PHONE
 ORDER ADDRESS
 ORDER CITY
 ORDER STATE
 ORDER ZIP
 ORDER COUNTRY

ORDER INFORMATION
 ORDER NO.
 ORDER DATE
 ORDER TIME
 ORDER FAX
 ORDER PHONE
 ORDER ADDRESS
 ORDER CITY
 ORDER STATE
 ORDER ZIP
 ORDER COUNTRY

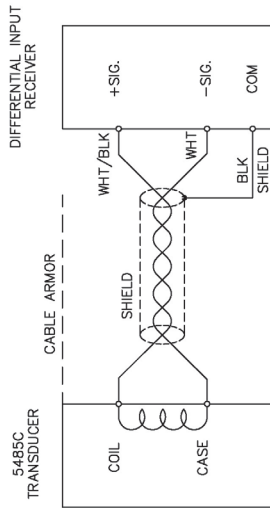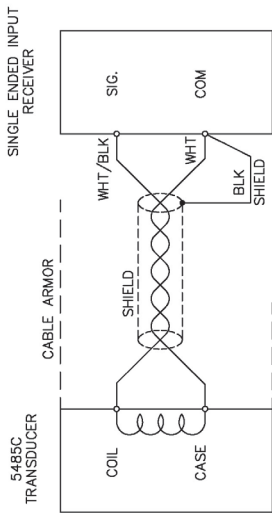

AGENCY APPROVED PRODUCT
DO NOT DEVIATE FROM
DOCUMENTED CONSTRUCTION
ON LISTED PARTS

METRIX INSTRUMENTALS, TEXAS	
SPECIFICATION MODEL 54B5C, HIGH TEMPERATURE VELOCITY TRANSDUCER MIL-STD-883C (METHOD 2000)	
REV	7623 W
DATE: 4-1-11	

SENSOR VERIFICATION CALIBRATION PROCEDURE

Mount the 5485C on a shaker table and verify the RMS output per table below.

CALIBRATION VERIFICATION TABLE 1 ips peak @ 150Hz		
Calibrated Sensitivity mV/in/s	Calibrated Sensitivity mV/mm/s	RMS Output mV Min/Max.
105	4.14	67/81
145	5.71	93/112
150	5.91	95/167
200	7.87	127/156

The test should be performed on a NIST traceable shaker at 1 ips, 150Hz.

Metrix recommends that this procedure be performed every 3 years.



NOTE: Due to the difficulties of field sensor verification, the +/- 5% sensitivity specification is relaxed to +/- 10%. The sensor should be returned to Metrix, Houston, Texas for metrology verification of factory calibration.

ENVIRONMENTAL INFORMATION



This electronic equipment was manufactured according to high quality standards to ensure safe and reliable operation when used as intended. Due to its nature, this equipment may contain small quantities of substances known to be hazardous to the environment or to human health if released into the environment. For this reason, Waste Electrical and Electronic Equipment (commonly known as WEEE) should never be disposed of in the public waste stream. The “Crossed-Out Waste Bin” label affixed to this product is a reminder to dispose of this product in accordance with local WEEE regulations. If you have questions about the disposal process, please contact Metrix Customer Service.

info@metrixvibration.com
www.metrixvibration.com
8824 Fallbrook Dr. Houston, TX 77064, USA
Tel: 1.281.940.1802 • Fax: 1.713.559.9421